

M7100 Pressure Transducer



- Performance standard to on and off highway engines and vehicle OEMs
- Rugged for heavy equipment and outdoor use
- Designed specifically for high volume applications
- Stainless Steel wetted surfaces
- Medium to extremely high pressures
- CE Approval

DESCRIPTION

The M7100 pressure transducer from the Microfused™ line of MEAS sets a new price performance standard for demanding engine and vehicle, and industrial applications. This transducer is suitable for measurement of liquid or gas pressure, even for difficult media such as contaminated water, steam and corrosive fluids.

The transducer pressure cavity is machined from a solid piece of 17-4 PH stainless steel. The standard version includes a 1/4 NPT pipe thread allowing a leak-proof, all metal sealed system. There are no O-rings or organics exposed to the pressure media and the durability is excellent. This automotive grade pressure transducer with stainless steel hermetic pressure ports and integral electrical connector boasts up to 43,000psi (3000Bar). The M7100 exceeds the latest industrial CE requirements including surge protection and is overvoltage protected to 16Vdc in both positive and reverse polarity.

FEATURES

- Hermetic Pressure Ports
- Integral Electrical Connector
- Survives High Vibration
- $\pm 0.25\%$ Accuracy
- Water Resistant 1M immersion

APPLICATIONS

- On and Off Highway Engines and Vehicles
- HVAC Refrigeration Controls
- Compressors
- Hydraulics
- Energy and Water Management

STANDARD RANGES

Range	psiG	Range	BarG
0 to 300	•	0 to 020	•
0 to 500	•	0 to 035	•
0 to 01K	•	0 to 070	•
0 to 03K	•	0 to 200	•
0 to 05K	•	0 to 350	•
0 to 10K	•	0 to 700	•

*For higher pressure ranges, please consult factory.

M7100 Pressure Transducer

PERFORMANCE SPECIFICATIONS

Supply Voltage: 5V

Ambient Temperature: 25°C (unless otherwise specified)

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Supply Voltage	4.75	5.00	5.25	V	
Supply Current		4	10	mA	
Ratiometric Output	0.5		4.5	V	1
Load Resistance	10			KΩ	
Accuracy (combined linearity, hysteresis & repeatability)	-0.25		0.25	%Span	2
Total Error Band	-1.0		1.0	%	3
Compensated Temperature	-20		+85	°C	
Operating Temperature	-40		+125	°C	
Storage Temperature	-50		+125	°C	
Insulation Resistance (500Vdc)	100			MΩ	4
Reverse Voltage			16	V	
Overvoltage Protection			16	V	
Short Circuit Protected		Yes			
Output Noise @ 1kHz		10		mV	
Response Time (10% to 90%)			1.0	ms	
Long Term Stability	-0.25		0.25	%Span/Year	
Frequency Response @ 1kHz			-3	dB	
Recommended Torque		81 lbf-ft			

Notes

1. Ratiometric to supply voltage.
2. Best fit straight line.
3. Over the compensated temperature range.
4. Between sensor body to any pins of connector.

ENVIRONMENTAL SPECIFICATIONS

Supply Voltage: 5V

Ambient Temperature: 25°C (unless otherwise specified)

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Humidity (@40°C)			93	%RH	
Pressure Overload			2X	Rated	
Pressure Burst			5X	Rated	5
Pressure Cycle	10M			Cycles	
Media, Pressure Port		Fluids compatible with 17-4PH Stainless Steel			
Mechanical Vibration		20g, 10 ~ 2000Hz MIL-STD-810C, Method 810C, Curve L			
Mechanical Shock		Half-Sine, Peak: 50g, 11ms MIL-STD-202, Method 213B, Condition A			
Package Protection		IP67 (IEC60529)			

Notes

5. The maximum pressure that can be applied to a transducer without rupture of either the sensing element or transducer.

M7100 Pressure Transducer

Agency Approvals

IEC61000-4-2 Electrostatic Discharge Immunity: 8kV Contact; 15kV Air; 3 Discharges; Class B. Unit survived

IEC61000-4-3 EM Field Immunity: 100V/m, 80MHz~1GHz, 255 MHz steps, 3s Dwell. Max recorded output error $<\pm 1.5\%$

IEC61000-4-4 Electrical Fast Transient Immunity: 1kV (Level 2), 120s, 5kHz Repetition Rate. Class B. Max recorded output error $<\pm 1.5\%$

IEC61000-4-5 Surge: 1kV (Level 2), L-L 500V, L-E 1kV. Class B. Max recorded output error $<\pm 1.5\%$

IEC61000-4-6 Conducted Immunity: 10V/140dB, 150kHz~80MHz (Level 3). Class B. Max recorded output error $<\pm 1.5\%$

IEC61000-4-9 Pulsed Magnetic Field Immunity: 100A/m (Level 3). Class B. Max recorded output error $<$

IEC55022 Emission: Class A, 40dB 30-220MHz, 47dB 230MHz-1GHz

Pressure Port Options

Dim A (inches) [mm]

2 = 1/4-19 BSP Male

.43[11.0]

4 = 7-16-20 UNF Male SAE J514, O-Ring Buna-N 70SH-904, ID8.92mm x W1.83mm

.36[9.1]

5 = 1/4-18 NPT

.56[14.2]

6 = 1/8-27 NPT

.38[9.7]

P = 7/16-20UNF Female w/ Integral Valve Depressor

.54[13.7]

Q = M10 x 1.0mm Male


.38[9.6]

Others available upon request

M7100 Pressure Transducer

DIMENSIONS


DIMENSION ARE IN INCHES [mm]

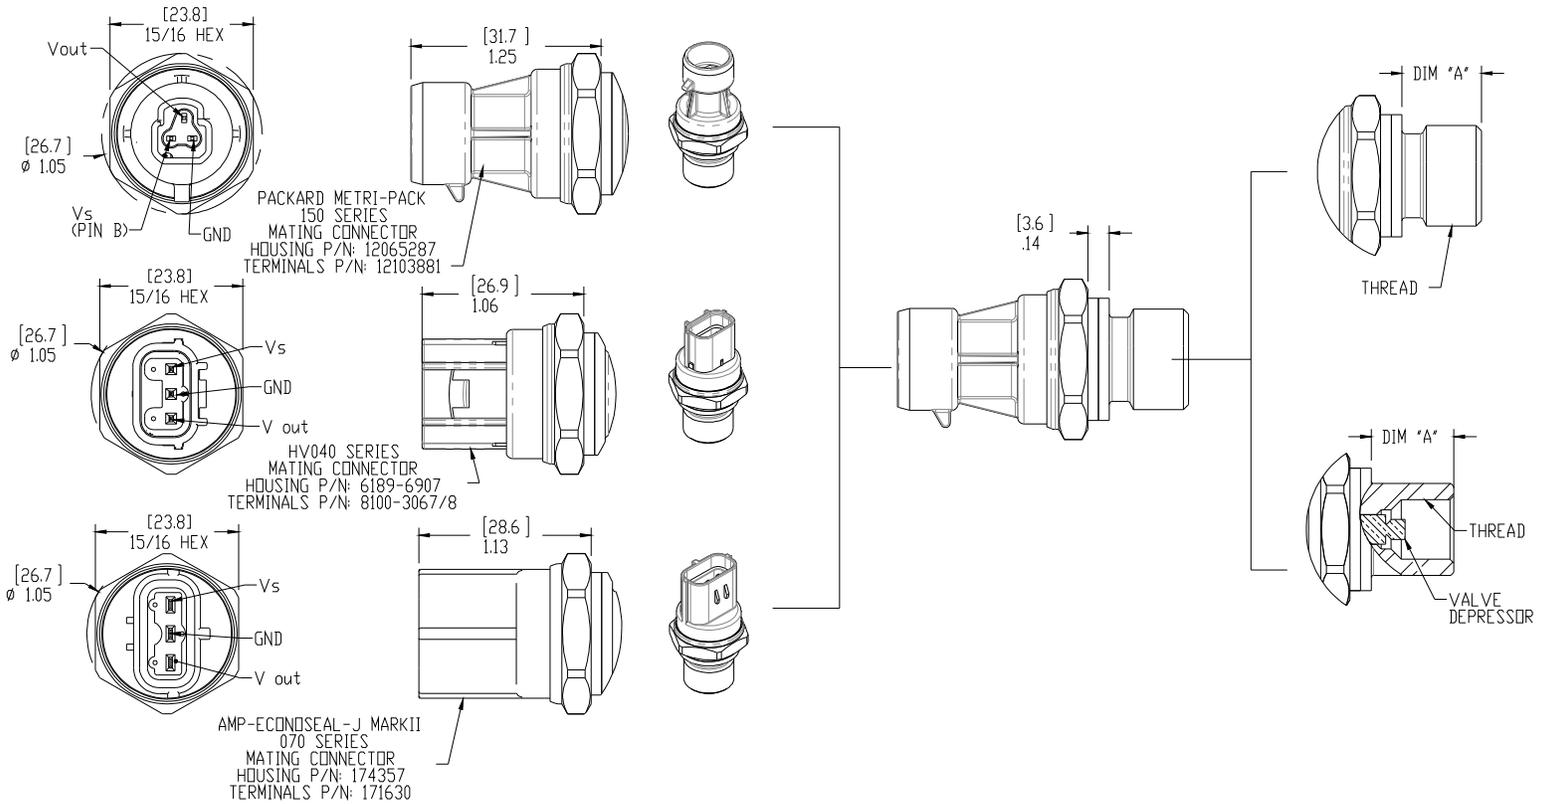

M7100 Pressure Transducer

ORDERING INFORMATION

M7138-300PG-200000

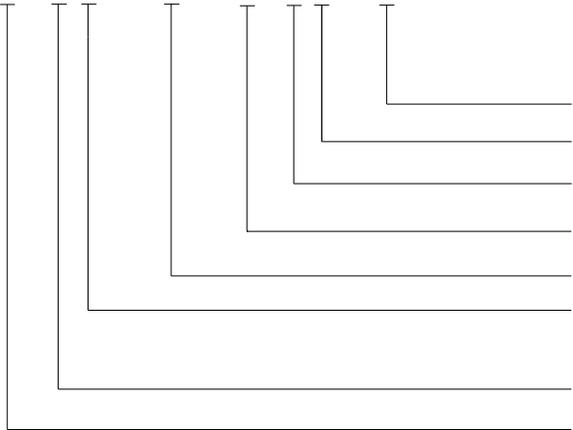

- Specials (nnnn = Custom Drawing)
- Port Material (0 = 17-4PH SST)
- Pressure Port (See Pressure Port Options Table)
- Type (G = Gage)
- Pressure Range (See Pressure Range Table)
- Connection (7 = AMP Connector, 8 = Sumitomo Connector, 9 = Packard Connector [Supply; PIN B])
- Output (3 = 0.5 - 4.5V)
- Model