

- Stainless Steel with O-Ring Seal
- Pressure/Temperature Read-Out
- Digital Output (24-bit $\Delta \Sigma$ ADC)
- ASIC Calibrated
- Absolute, Sealed Gage
- 9mm Diameter



DESCRIPTION

The 89BSD is a 9mm diameter small profile, media compatible, piezoresistive silicon pressure sensor packaged in a 316L stainless steel housing. This low power 24-bit $\Delta\Sigma$ ADC digital output pressure sensor supports an I²C interface protocol and is designed for threaded o-ring mounting. A custom ASIC is used for temperature compensation and offset correction. The sensing package utilizes silicone oil to transfer pressure from the 316L stainless steel diaphragm to the sensing element. A flex cable allows the 89BSD to connect to a smaller connection terminal where size is of primary concern.

The 89BSD is designed for high performance, low pressure applications.

For a similar sensor with a plastic threaded fitting, refer to the LM pressure transducer.

FEATURES		APPLICATIONS		
 Threaded/Weldable I²C Interface Low Power: <1µA Standby Power: <0 Supply Voltage: 1.8 	.15µA	 Level Controls Tank Level Measurement Corrosive Fluids and Gas Measurement Systems Sealed Systems Manifold Pressure Measurement Barometric Pressure Measurement Dive Computers 		
STANDARD RANG	ES			
Range 0 to 006	BarA	BarS		

0 to 006	•	•
0 to 012	•	•
0 to 018	•	•
0 to 028	•	•
0 to 030	•	•

Intermediate pressure ranges available, contact factory

PERFORMANCE SPECIFICATIONS

Supply Voltage: 3Vdc

Ambient Temperature: 25°C (unless otherwise specified)

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
ADC			24	bit	
Input Voltage Range	1.8		3.6	V	2
Supply Current		See Table 1		mA	
Pressure Resolution		See Table 3		%Span	3
Pressure Accuracy		±0.3		%Span	
Total Error Band		See Graph 1		%Span	
Conversion Time		See Table 2		ms	3
Long Term Stability		±0.2		%Span/yr	
Compensated Temperature	-20		+85	°C	
Temperature Resolution		See Table 3		°C	
Temperature Accuracy	-2		+2	°C	
Operating Temperature	-40		+85	°C	
Storage Temperature	-40		+125	°C	
Pressure Overload			2X	Rated	4
Pressure Burst			ЗX	Rated	5
Interface Type		I ² C			6
Media, Pressure Port	Liquids a	nd gases compatible	with 316/316L \$	Stainless Steel	

Notes

1. Coefficients must be read by microcontroller software and are to be used in a mathematical calculation for converting D1 and D2 into compensated pressure and temperature values. For calculation methods and coefficients, see application note APP-01006.

2. Output is not ratiometric to supply voltage.

3. Oversampling ratio: 256 / 512 / 1024 / 2048 / 4096. See Table 2.

4. 2X or 400psi, whichever is less. The maximum pressure that can be applied without changing the transducer's performance or accuracy.

5. 3X or 600psi, whichever is less. The maximum pressure that can be applied to a transducer without rupture of either the sensing element or transducer.

6. Output protocol is I²C only. CSB is tied to GND, setting I²C address: 1110111

Table 1: Supply Current Characteristics

PARAMETERS	Symbol	Conditions		MIN	TYP	MAX	UNITS
		OSR	4096		12.5		
Supply Current	I _{DD}		2048		6.3		
Supply Current (1 Sample per second)			1024		3.2		μA
			512		1.7		
			256		0.9		
Peak Supply Current			ring ersion		1.4		mA
Standby Supply Current		@ 2	25°C		0.02	0.14	μA


Table 2: Analog Digital Converter (ADC)

PARAMETERS	Symbol	Cond	litions	MIN	ТҮР	MAX	UNITS
		OSR	4096	7.40	8.22	9.04	
			2048	3.72	4.13	4.54	
Conversion Time	t _c		1024	1.88	2.08	2.28	ms
			512	0.95	1.06	1.17	
			256	0.48	0.54	0.60	


Table 3: Typical Resolution

OSR	Typical Pressure Resolution (%Span)	Typical Temperature Resolution (°C)
4096	0.0015	0.002
2048	0.0025	0.003
1024	0.003	0.005
512	0.005	0.008
256	0.008	0.012

Graph 1:

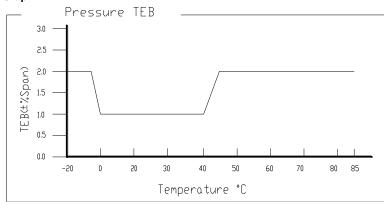


PERFORMANCE SPECIFICATIONS

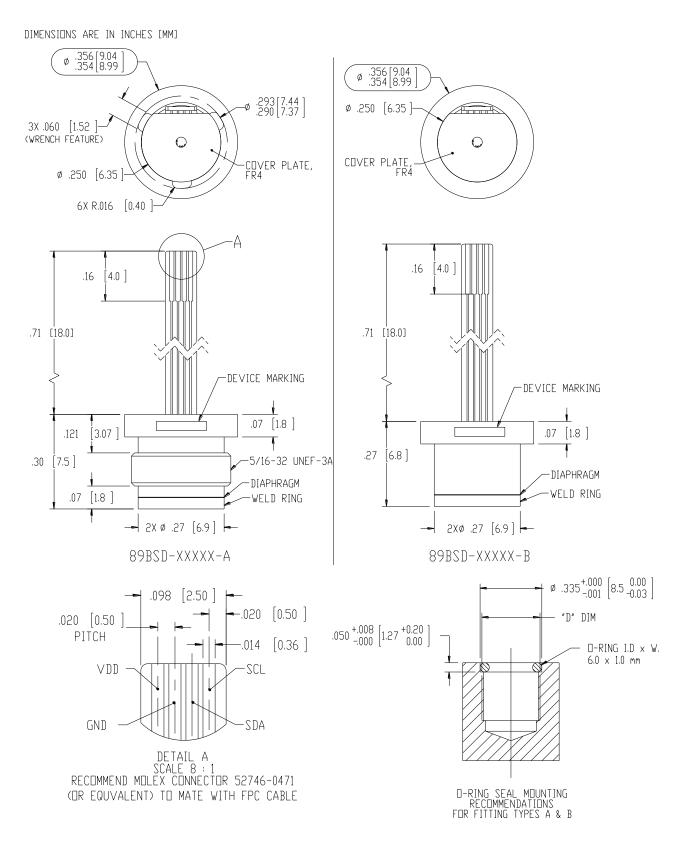

Tel:+86-20-34387714

89BSD Digital Output








TABLE 4							
FITTING TYPE	"A" DIM	"B" DIM	"C" DIM	"D" DIM			
4	1/4-18 NPT						
5	1/4-19 BSP	.82 [20.8]	3/4 [19.0] HEX	N/A			
8	1/8-27 NPT	.71 [18.0]	5/8 [15.9] HEX				
A	5/16-32 UNEF- 3B⊽.25						
В	ø.28⊽.25						
	NDTE : FITTING TYPE '-4' ASSEMBLY SHOWN FAR LEFT ALL DIMS ARE FOR REFERENCE ONLY						


BLOCK DIAGRAM

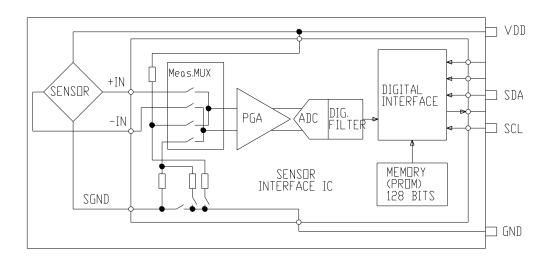

RECOMMENDED WRENCH DIMENSIONS



ORDERING INFORMATION

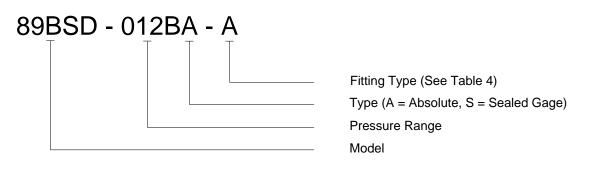

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

Guangzhou Ankai Electronic Instrument Co., Ltd.